

TekMed

CONCEALMENT TRANSPORT TROLLEY

HTW 50/130-CF-FO-UP-2100-XXX





THE HTW TRANSPORT TROLLEY IS DESIGNED TO RETRIEVE AND TRANSPORT DECEASED BETWEEN THE WARD AND MORTUARY WITH REDUCED EFFORT.

THE TROLLEY IS BUILT WITH A RUGGED, TORSION-RESISTANT FRAME IN EITHER POWDER COATED STEEL OR STAINLESS STEEL CONSTRUCTION. MOVEMENT CAN BE FURTHER AIDED VIA THE OPTIONAL 24V ON-BOARD TRACTION DRIVE SYSTEM, HAND THROTTLE AND CONTROL PANEL, ALLOWING FOR EASY MOVEMENT; ALL POWERED BY THE LATEST 12/24V MAG-PLUG SMART CHARGER.

THE TOP DECK ALLOWS FOR EASY TRANSFER FROM THE BED-SIDE, AND THE TROLLEY CAN BE FITTED WITH A VARIETY OF TOP DECKS TO SUIT THE NEEDS OF THE USER, INCLUDING ROLLER SYSTEMS (FOR ROLL ON BODY TRAYS), WET TOP FIXED TRAYS AND FLAT TOPS.



STANDARD

Concealment frame CF-FO-UP 2100-620/660
Dim W/D/H 800x2100x400 mm
Article no. 050.015.030
Spare part (PVC cover) Art. no. 050.015.022

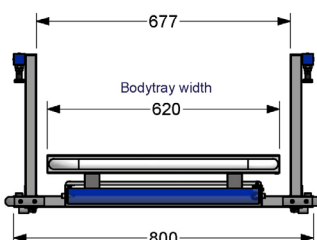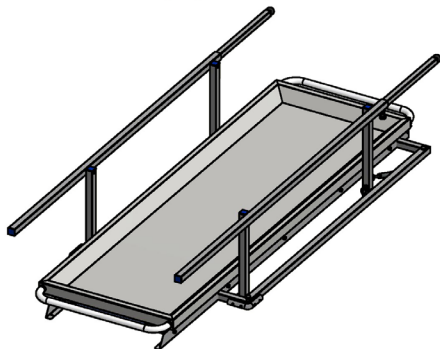



BARIATRIC

Concealment frame CF-FO-UP 2100-750
Dim W/D/H 900x2100x400 mm
Article no. 050.015.039
Spare part (PVC cover) Art. no. 050.015.025

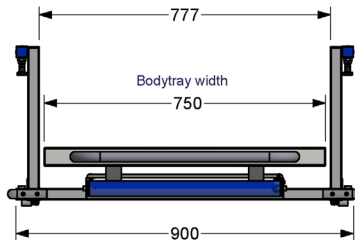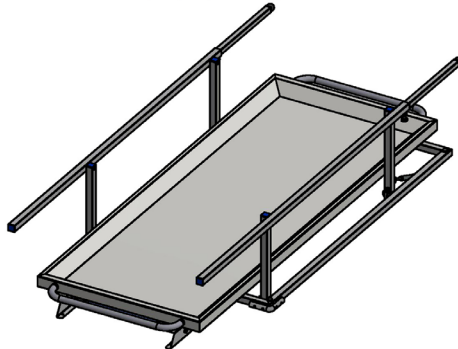

EXTRA LARGE

Concealment frame CF-FO-UP 2100-800
Dim W/D/H 950x2100x400 mm
Article no. 050.015.037
Spare part (PVC cover) Art. no. 050.015.026

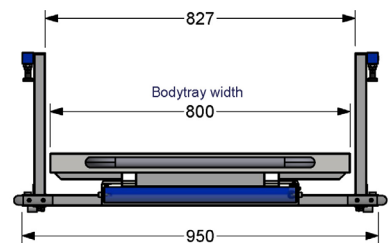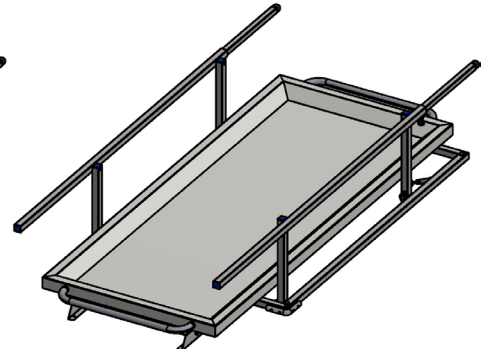

OPTIONS

- 3 AVAILABLE CONCEALMENT FRAME SIZES
- 125MM CASTORS (200MM OPTION)
- POWDER COATED OR STAINLESS STEEL CONSTRUCTION
- FAT-HTW-24 TRACTION DRIVE UNIT WITH CONTROL PANEL DUAL DRIVE. TROLLEY CAN TURN WITH-IN ITS OWN LENGTH.
- MOTORIZED TRAY/COFFIN LOADER FOR 'HANDS-FREE' OPERATION
- MATCHING RACKING SYSTEMS (INCLUDING TRAYS) ALSO AVAILABLE



TECHNICAL DATA

DIMENSIONS AT LOWEST POSITION (LxWxH)
2150 x 725 x 330MM
DIMENSIONS AT HIGHEST POSITION (LxWxH)
2150 x 725 x 1650MM
CARRYING CAPACITY
MAX. 350KG
MATERIAL
POWDER COATED STEEL OR STAINLESS STEEL
MODEL No. HTW 50/130-CF-FO-UP

COVER COLOUR RANGE

008 250 cm 98.43"	transparent	90*** weiß RAL 9010 150, 180, 204, 216, 238, 250, 275, 275, 300, 320 cm	141 250 cm 98.43"	perweiß RAL 1013	143 250 cm 98.43"	hellfeinbein RAL 1015				
123 250 cm 98.43"	beige RAL 1014	170 250 cm 98.43"	warsteiner*	168 250 cm 98.43"	zinkgelb	101 218, 250 cm RAL 1021 85.83", 98.43"				
107 250 cm 98.43"	ginstergelb RAL 1002	118 250 cm 98.43"	brilliantgelb	148 218, 250, 275 cm RAL 1003 85.83", 98.43", 108.27"	175 250 cm 98.43"	chromgelb RAL 1028				
137 250 cm 98.43"	narrisengelb RAL 1007	206 250 cm 98.43"	tieforange RAL 2011	221 218, 250 cm RAL 2008 85.83", 98.43"	244 250 cm 98.43"	reinerorange RAL 2004				
290 250 cm 98.43"	amerikanrot RAL 3020	340 250 cm 98.43"	coca cola** Rot 2000	358 218, 250, 300 cm RAL 3000 98.43", 118.11"	370 250 cm 98.43"	käminrot RAL 3002 218, 250, 275 cm 85.83", 98.43", 108.27"				
311 250 cm 98.43"	bcapulais	323 250 cm 98.43"	viola Pantone 273 C	548 218, 250 cm RAL 5012 85.83", 98.43"	583 250 cm 98.43"	wasserblau				
543 218, 250, 300 cm 85.83", 98.43", 118.11"	königsblau	572 250 cm 98.43"	blau	537 218, 250, 275, 300 cm RAL 5010 85.83", 98.43", 108.27", 118.11"	557 218, 250 cm RAL 5013 85.83", 98.43"	ultrablau	544 218, 250 cm RAL 5002 85.83", 108.27"	ultramarin	566 218, 250, 275 cm RAL 5013 85.83", 98.43", 108.27"	kobaltblau RAL 5013
590 250 cm 98.43"	tiefblau	619 250 cm 98.43"	gelbgrün RAL 6018	602 250 cm 98.43"	brillantgrün RAL 6024	683 218, 250 cm RAL 6001 85.83", 98.43"	smaragdgrün	636 218, 250, 275 cm RAL 6026 85.83", 98.43", 108.27"	682 250 cm 98.43"	russischgrün RAL 6028
679 250 cm 98.43"	moosgrün RAL 6005	746 250 cm 98.43"	grauweiß RAL 9002	729 218, 250, 275 cm RAL 7035 85.83", 98.43", 108.27"	717 250, 275 cm 98.43", 108.27"	blausgrau	705 218, 250 cm RAL 7035 85.83", 98.43"	hellgrau	788 250 cm 98.43"	staubgrau
763 218, 250 cm 98.83", 98.43"	alugrau RAL 7037	782 250 cm 98.43"	anthrazit RAL 7016	830 250 cm 98.43"	schoko RAL 8017	905 218, 250, 275, 300 cm RAL 9005 85.83", 98.43", 108.27", 118.11"	schwarz	911 218, 250, 275, 300 cm RAL 9006 85.83", 98.43", 108.27", 118.11"	silber RAL 9006	907 weiß RAL 9010 59.06", 70.87", 90.31", 85.83", 93.70", 98.43", 108.27", 109.84", 118.11", 129.58"

TekMed

TekEquipment

AU 1300 368 138

NZ 0800 456 217

tekequipment.com.au

